


PROWEAVE™ - L

Openness | 1% 3%



Oyster/Pearl Grey

Shown in Openness 3%

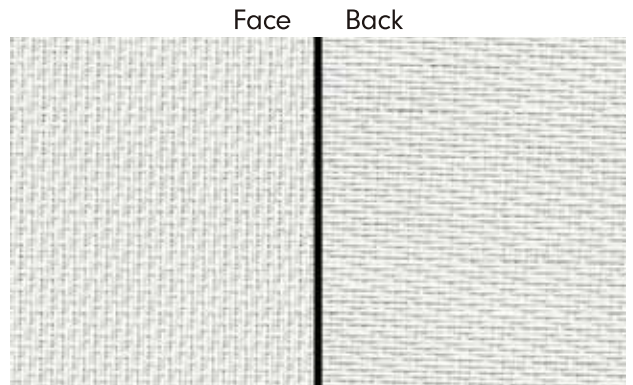


Oyster



Oyster/Beige



Oyster/Chestnut

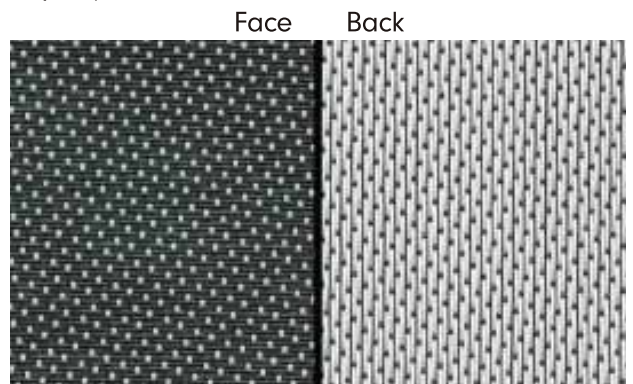

Oyster/Charcoal

PROWEAVE™ - L

Specifications



COMPOSITION

25% Polyester, 75% Vinyl



WEAVE STYLE

Satin Weave 2-Sided Fabric



WIDTH

98" (250 cm)
118" (300 cm)



FABRIC WEIGHT

1% 500 g/m² (14.75 oz/sqyd)
3% 430 g/m² (12.68 oz/sqyd)



FABRIC THICKNESS

1% 0.69 mm (0.027") ± 5%
3% 0.66 mm (0.026") ± 5%



UV BLOCKAGE

1% 99%
3% 97%



GREEN STANDARDS

GreenGuard Gold



FIRE CLASSIFICATION

Canada: CAN/ULC S-109
USA: NFPA 701



FIRE CLASSIFICATION



ProWeave™ - L | 1% Openness

Colour	Side	Rs	As	Ts	Tv
Oyster	Room	65%	16%	19%	13%
	Street	65%	16%	19%	13%
Oyster/Beige	Room	57%	15%	28%	12%
	Street	52%	20%	28%	12%
Oyster/Grey	Room	54%	38%	8%	4%
	Street	56%	35%	9%	4%
Oyster/Chestnut	Room	41%	53%	6%	8%
	Street	49%	45%	6%	8%
Oyster/Charcoal	Room	38%	57%	5%	6%
	Street	41%	53%	6%	6%

ProWeave™ - L | 3% Openness

Colour	Side	Rs	As	Ts	Tv
Oyster	Room	64%	16%	20%	14%
	Street	64%	16%	20%	14%
Oyster/Beige	Room	53%	31%	16%	10%
	Street	59%	25%	16%	10%
Oyster/Grey	Room	42%	44%	14%	9%
	Street	54%	32%	14%	9%
Oyster/Chestnut	Room	13%	83%	4%	4%
	Street	42%	53%	4%	6%
Oyster/Charcoal	Room	10%	87%	3%	2%
	Street	40%	57%	3%	2%

As (Solar Absorption) + Rs (Solar Reflection) + Ts (Solar Transmission) = 100% of solar energy. Tv = Visible Light Transmission. All performance values are measured within tolerances of ±5%.

Contact ELITE PRO for larger fabric swatches.

© 2018, ELITE PRO, A division of Elite Vertical Blinds Mfg. Co. Ltd.